

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
21 October 2004 (21.10.2004)

PCT

(10) International Publication Number  
**WO 2004/089847 A1**

(51) International Patent Classification<sup>7</sup>: **C04B 28/02**,  
14/04, C09K 21/02, E04B 1/94 // (C04B 28/02, 14:04,  
18:26)

(21) International Application Number:  
PCT/NL2004/000237

(22) International Filing Date: 8 April 2004 (08.04.2004)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:  
1023149 11 April 2003 (11.04.2003) NL

(71) Applicant (for all designated States except US):  
**DURISOL-RAALTE B.V.** [NL/NL]; Almelosestraat  
83, NL-8102 HC Raalte (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WALTER, Rein-**  
**hard** [DE/DE]; August Bebelstrasse 10a, 99706 Sonder-  
shausen (DE). **VELDHOEN, Arend, Johan** [NL/NL];  
Burg, Kerssemakersstraat 55, NL-8101 AM Raalte (NL).

(74) Agent: **PRINS, Hendrik, Willem**; Arnold & Siedsma,  
Sweelinckplein 1, NL-2517 GK The Hague (NL).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: FIRE-INSULATING WALL COVERING AND A PREPARATION METHOD FOR SAME

(57) Abstract: The invention relates to a sound-absorbing and fire-insulating wall covering, comprising a cured mixture of: (i) 5-20% by weight mineralized wood fibre; (ii) 20-60% by weight sand with an SiO<sub>2</sub> content of less than 5% by weight and a greywacke content of at least 30% by weight; and (iii) 20-50% by weight cement, and to a method of preparing a fire-insulating wall covering, wherein relative to the cured weight are mixed 5-20% by weight mineralized wood fibre, 30-60% by weight sand with an SiO<sub>2</sub> content smaller than 5% by weight and a greywacke content of at least 30% by weight, and 20-50% by weight cement, and 10-30% by weight water is then added, whereafter the mixture is cured to form the fire-insulating wall covering.

WO 2004/089847 A1

10/552736

H/PRts  
JC05 Rec'd PCT/PTO 11 OCT 2005

**FIRE-INSULATING WALL COVERING AND A PREPARATION METHOD  
FOR SAME**

The present invention relates to a fire-insulating wall covering and to a method for preparing same. The present invention relates particularly to a fire-insulating and preferably also sound-absorbing wall covering which meets  
5 currently stringent requirements in respect of fire-insulating properties. Such a fire-insulating wall covering can be applied in tunnels, underground spaces such as shopping centres and the like.

Fire-insulating wall coverings known at the present time  
10 do not fully satisfy the stringent requirements in respect of fire-insulating properties." In the case of a fire load on such a wall covering, for instance for 120 minutes, and a temperature on the fire side lying in the range of 1100 to 1350°C for these two hours, these fire-insulating properties  
15 mean, among other things, that this wall covering insulates against fire such that on the side of the wall covering remote from the fire the temperature remains relatively low, and particularly below 225°C, preferably below 200°C.

The wall covering must moreover have good sound-  
20 absorbing properties and is asbestos-free.

The invention has for its object to provide such a fire-insulating and sound-absorbing wall covering as well as a method for preparation thereof. It is noted here that the wall covering can be applied per se, but is preferably  
25 applied as wall covering arranged on a supporting layer, for instance a concrete layer which can optionally be strengthened with a reinforcement. The underlying layers are

thus protected against high temperatures.

This is achieved according to the invention with a fire-insulating wall covering comprising a cured mixture of:

- i) 5-20% by weight mineralized wood fibre;
- 5 ii) 20-60% by weight sand with an  $\text{SiO}_2$  content of less than 5% by weight and a greywacke content of at least 30% by weight; and
- iii) 20-50% by weight cement.

The fire-insulating wall covering is in fact based on a  
10 cured cement plate having incorporated therein a specific type of wood fibre and a specific type of sand.

The applied wood fibre for inter alia sound absorption is a mineralized wood fibre. Such a mineralized wood fibre is obtained by bringing wood fibres into contact with a solution  
15 of aluminium sulphate. The wood fibres are generally obtained from residual wood which is processed in different steps to form wood fibre with a moisture content of about 15-25% (atmo basis). The aluminium sulphate is added in a quantity of about 2.5% relative to the wood fibre and supplemented with a  
20 quantity of water, whereby the moisture percentage rises to about 100% (atmo). The obtained wood fibres, which are thus covered with aluminium sulphate, are the mineralized wood fibres applied in the fire-insulating wall covering according to the invention.

25 The applied aluminium sulphate is of standard chemical quality.

The sand is a specific sand type since it is less than 5% by weight  $\text{SiO}_2$ . The sand further contains at least 30% by weight greywacke. Greywacke is a type of stone containing  
30 feldspar, apatite and the like. Clay mineral may also be present. It is a clastic sedimentary rock with a density of for instance 2.6 kg per  $\text{m}^3$ . The greywacke can be applied in different grain size distributions (or combinations), where

the grain size distribution is such that the average particle size can be around 1 mm, 4-8 mm, 11-16 mm.

The cement used is generally a portland cement, in particular a portland slag cement.

5 For an optimum fire-resistant property the wall covering preferably has a content of mineralized wood fibre of preferably 7-15% by weight, more preferably 10-15% by weight. By selecting the content of mineralized wood fibre subject to the desired properties, not only is an optimum fire-resistant  
10 property obtained but also an optimum sound-insulating property. It is striking in this respect that use is made of a component based on wood fibre to obtain fire-resistant properties.

The fire-insulating wall covering preferably contains  
15 35-50% by weight sand, while the  $\text{SiO}_2$  content is preferably lower than 2.5% by weight, more preferably lower than 2% by weight. By opting for a relatively low  $\text{SiO}_2$  content in combination with an optimal choice of the quantity of greywacke, (preferably at least 50% by weight), optimum fire-  
20 insulating properties are obtained and the fire breakthrough can be extended a very long time and far beyond the test time (2 hours).

A fire-insulating wall covering is found to suffice well in practice if it preferably contains

- 25 i) 10-15% by weight mineralized wood fibre;  
ii) 35-50% by weight sand with an  $\text{SiO}_2$  content smaller than 2% by weight and a greywacke content greater than 50% by weight; and  
iii) 25-40% by weight cement.

30 The best properties are obtained if in this case the cement is a low-chromate cement.

The fire-insulating and fire-resistant properties of the wall covering can be further improved if the mineralized wood

fibres and/or the side of the wall covering to be exposed are provided with an impregnation which further improves the fire resistance and/or the durability of wood fibres. Such an impregnating agent is for instance the impregnating agent  
5 described in the German patent application 197 27998. This impregnating agent is preferably applied to the mineralized wood fibres in a quantity of 0.1-1% by weight, more preferably 0.1-0.5% by weight. In the case the wall covering is arranged on a wall to be exposed, it is recommended to  
10 apply the impregnating agent in a quantity of 30-500 gram per m<sup>2</sup>, preferably 100-250 gram per m<sup>2</sup>.

The fire-insulating wall covering according to the invention can in principle be formed on-site and cured on-site in a mould. It is however also possible for pre-cured  
15 plates to be taken to the location of use.

If the fire-insulating wall covering has an insufficient strength in itself and insufficient bearing capacity, it is recommended to arrange such a fire-insulating wall covering on a supporting layer, for instance a concrete layer or  
20 concrete plate.

In that case the fire-insulating wall covering can be formed on an already present concrete plate and attached thereto using connecting means. Another option is to arrange finished fire-insulating wall coverings on a prepared support  
25 layer using fixing means. Use is made in this case of openings arranged in the fire-insulating wall covering for arranging the fixing means and of plugs of fire-insulating wall covering to cover the fixing means.

In the case that a plurality of plates of fire-  
30 insulating wall covering according to the invention are applied, this results in joints. For optimal retention of the fire-insulating properties at the position of the joint, it is recommended to make use of an offset joint and to fill

this joint with either fire-insulating wall covering in uncured form or with another fire-insulating seal.

A good fire-insulating wall covering is generally obtained according to the invention if relative to the cured  
5 weight are mixed 5-20% by weight mineralized wood fibre, 30-60% by weight sand with an  $\text{SiO}_2$  content smaller than 5% by weight and a greywacke content of at least 30% by weight; and 20-50% by weight cement, and 10-30% by weight water is then added, whereafter the mixture is cured to form the fire-  
10 insulating wall covering. Wall thicknesses of 10 to 500 mm are generally possible.

Mentioned and other features of the fire-insulating wall covering according to the invention and of the method for preparing such a fire-insulating wall covering will be  
15 further elucidated hereinbelow with reference to two embodiments, which are only given by way of example without the invention being deemed limited thereto.

Figures 1 and 3 each show a perspective view of a space provided with a fire-insulating wall covering; and figures 2  
20 and 4 each show a cross-section at the position of details II and IV respectively of figures 1 and 3.

For the preparation of the fire-insulating wall covering, use is made per  $\text{m}^3$  of:

- 12% by weight mineralized wood fibre
- 25 - 32% by weight portland slag cement
- 42% by weight sand ( $\text{SiO}_2$  content smaller than 5% by weight, greywacke content 42% by weight)
- 0.01% by weight pigment (chromium oxide)
- 0.1% by weight impregnating agent (DE 197 27998)
- 30 - residual water.

This mixture is placed in a mould provided with profiles, recesses for fixing points, rebates and joints. The mass is vibrated, pressed and finally released onto a ground

in order to cure. The formed plate is optionally sprayed at this moment with impregnating agent. Such a plate is applied in the embodiment shown in figures 1 and 2.

In another embodiment the fire-insulating wall covering according to the invention for curing is arranged, for instance in a curved mould, onto a support layer of concrete already arranged therein. After curing these structural parts can be applied in for instance the embodiment according to figures 3 and 4.

10 In another embodiment, preformed fire-insulating wall coverings according to the invention are placed in a mould after being provided with coupling means for coupling to the concrete layer to be arranged. Use is for instance made of wood screw bolts which protrude out of the surface and which  
15 will be taken up in the concrete layer to be arranged on this wall covering. Via the coupling means an optimal attachment is thus obtained between the concrete layer on the one hand and the wall covering according to the invention on the other.

20 Figure 1 shows a tunnel 1 provided with a concrete bearing structure 2 with fire-insulating wall coverings 3 according to the invention fixed thereto. Fixing means 4 are covered with conical plugs 5. Wall coverings 3 are mutually separated by a joint 6.

25 Figure 2 shows a detail in cross-section of the structure of this tunnel wall which is provided with wall coverings 3 according to the invention. Wall covering 3 is arranged in the concrete bearing structure 3 using fixing means 4, in this case cotter bolts 7. This bearing structure  
30 3 is further provided with a reinforcement 8.

As shown in figure 2, joint 6 is an offset joint which is filled, wholly or only in the two straight joint parts, with a fire-insulating seal 9, optionally a mass of the

insulating wall covering according to the invention still to be cured.

Figures 3 and 4 show a pedestrian passage 10, for instance in an underground station. Use is made in this case of wall plates 12 and 13 which are preformed and set up in situ. Wall plates 12 and 13 once again comprise a concrete support structure and a wall covering 14 according to the invention. Wall covering 14 is provided with wood screw bolts 15 onto which is poured the concrete bearing structure 11, which is also provided with a reinforcement 8.

In both cases the wall coverings 3 and 14 according to the invention are found to satisfy the stringent requirements made in respect of fire-insulating properties. When exposed to a temperature regime as according to the table below, it was found that on the side of such a 100 mm wall covering remote from the fire the temperature remains below 120°C, and is even close to a temperature lying between 100 and 110°C.

Time		Temperature
20	(min)	(°C)
	0	20
	3	890
	5	1140
	10	1200
25	30	1300
	60	1350
	90	1300
	120	1200



**CLAIMS**

1. Fire-insulating wall covering, comprising a cured mixture of:

- i) 5-20% by weight mineralized wood fibre;
- ii) 20-60% by weight sand with an  $\text{SiO}_2$  content of less than 5% by weight and a greywacke content of at least 30% by weight; and
- iii) 20-50% by weight cement.

2. Wall covering as claimed in claim 1, containing 7-15% by weight, preferably 10-15% by weight mineralized wood fibre.

3. Wall covering as claimed in claim 1 or 2, containing 35-50% by weight sand.

4. Wall covering as claimed in claims 1-3, wherein the sand has an  $\text{SiO}_2$  content smaller than 2.5% by weight, preferably smaller than 2% by weight.

5. Wall covering as claimed in claims 1-4, wherein the sand contains at least 40% by weight and preferably at least 50% by weight greywacke.

6. Wall covering as claimed in claims 1-5, containing 25-40% by weight cement.

7. Wall covering as claimed in claims 1-6, containing:


- i) 10-15% by weight mineralized wood fibre;
- ii) 35-50% by weight sand with an  $\text{SiO}_2$  content smaller than 2% by weight and a greywacke content greater than 50% by weight; and
- iii) 25-40% by weight cement.


8. Wall covering as claimed in claims 1-7, wherein the cement is low-chromate.

9. Wall covering as claimed in claims 1-8, containing 0.1-1% by weight, preferably 0.1-0.5% by weight impregnating agent and/or 30-500 gram per m<sup>2</sup>, preferably 100-250 gram per m<sup>2</sup> impregnating agent.

- 5        10. Method of preparing a fire-insulating wall covering as claimed in claim 1, wherein relative to the cured weight are mixed 5-20% by weight mineralized wood fibre, 30-60% by weight sand with an SiO<sub>2</sub> content smaller than 5% by weight and a greywacke content of at least 30% by weight, and 20-50%  
10 by weight cement, and 10-30% by weight water is then added, whereafter the mixture is cured to form the fire-insulating wall covering.


1/4

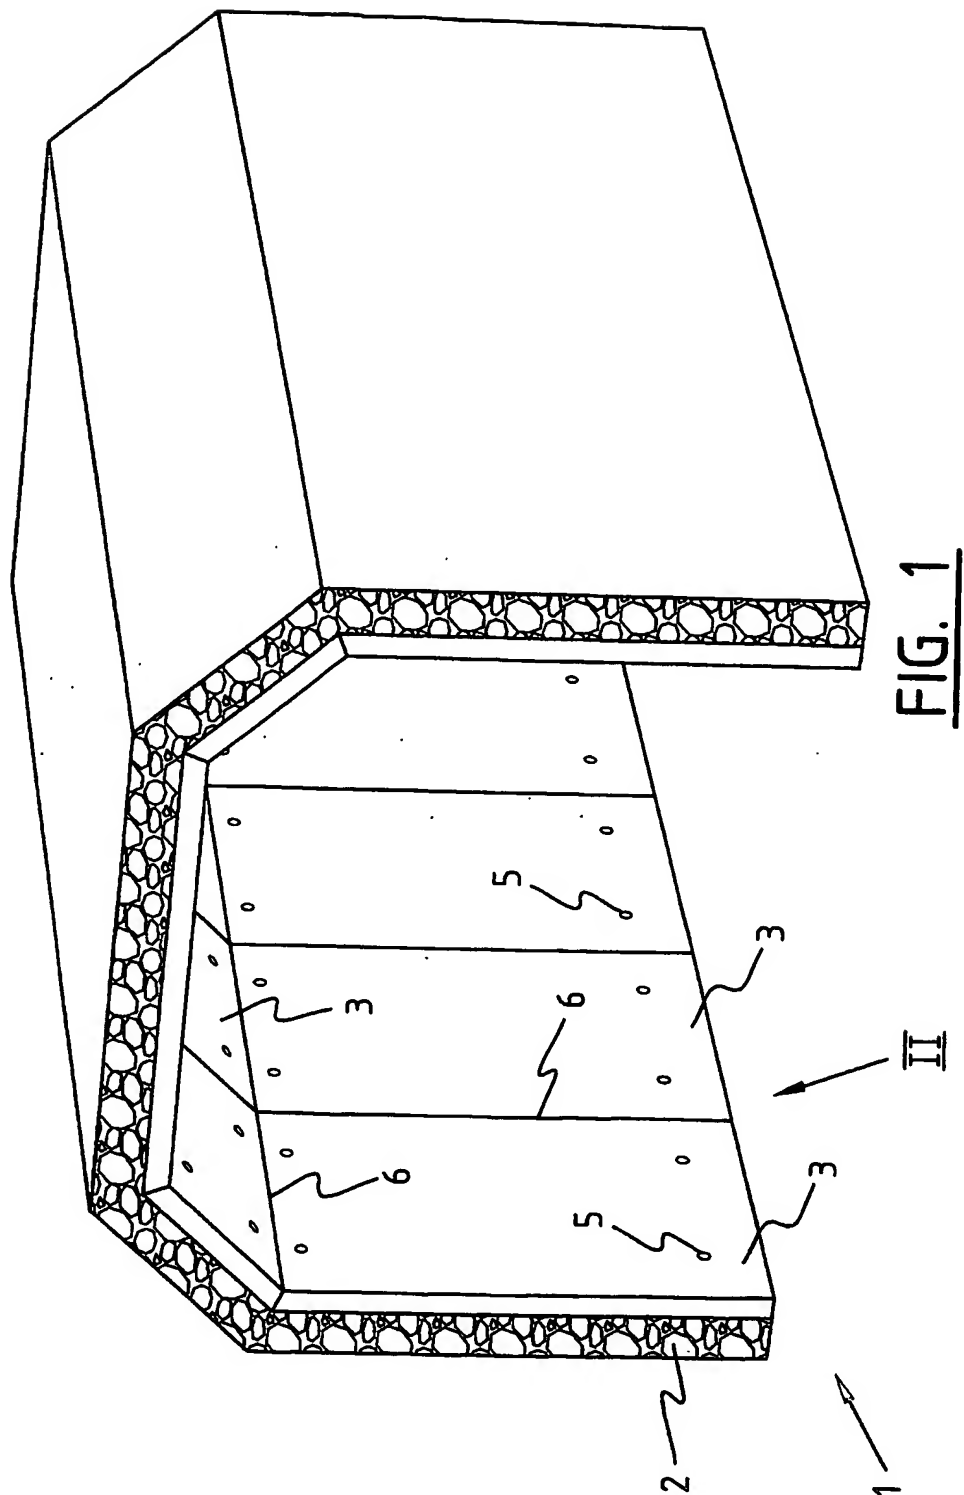

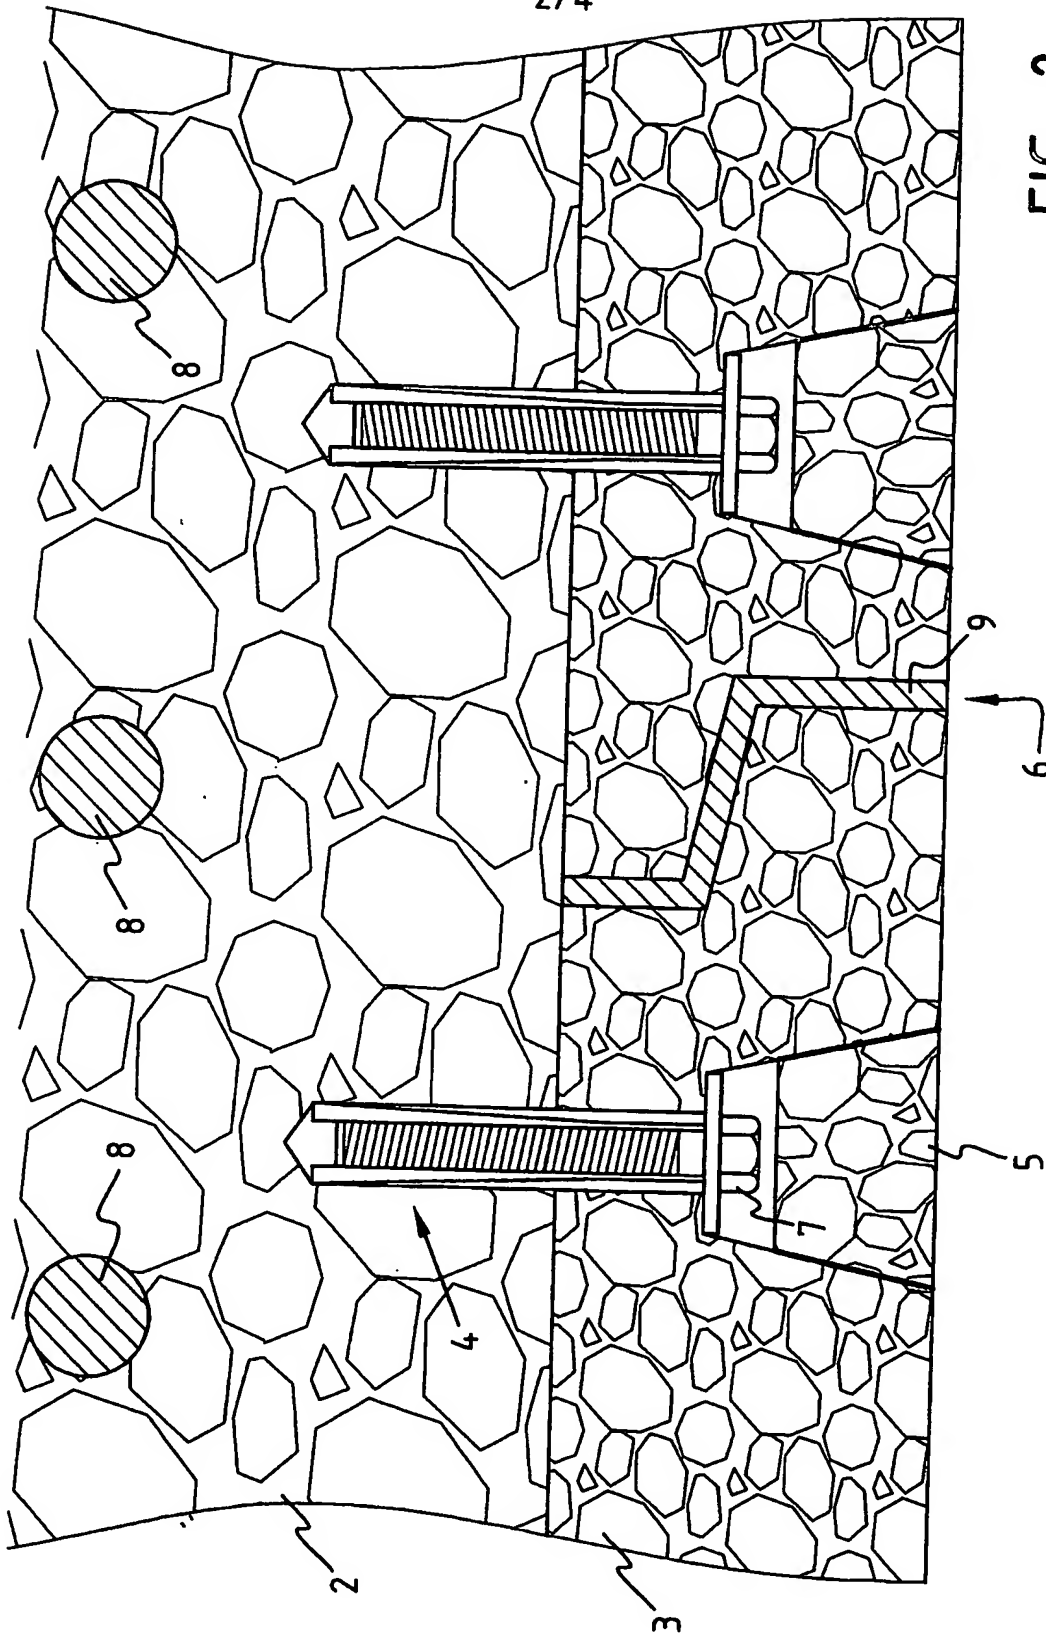


**FIG. 2**

3/4

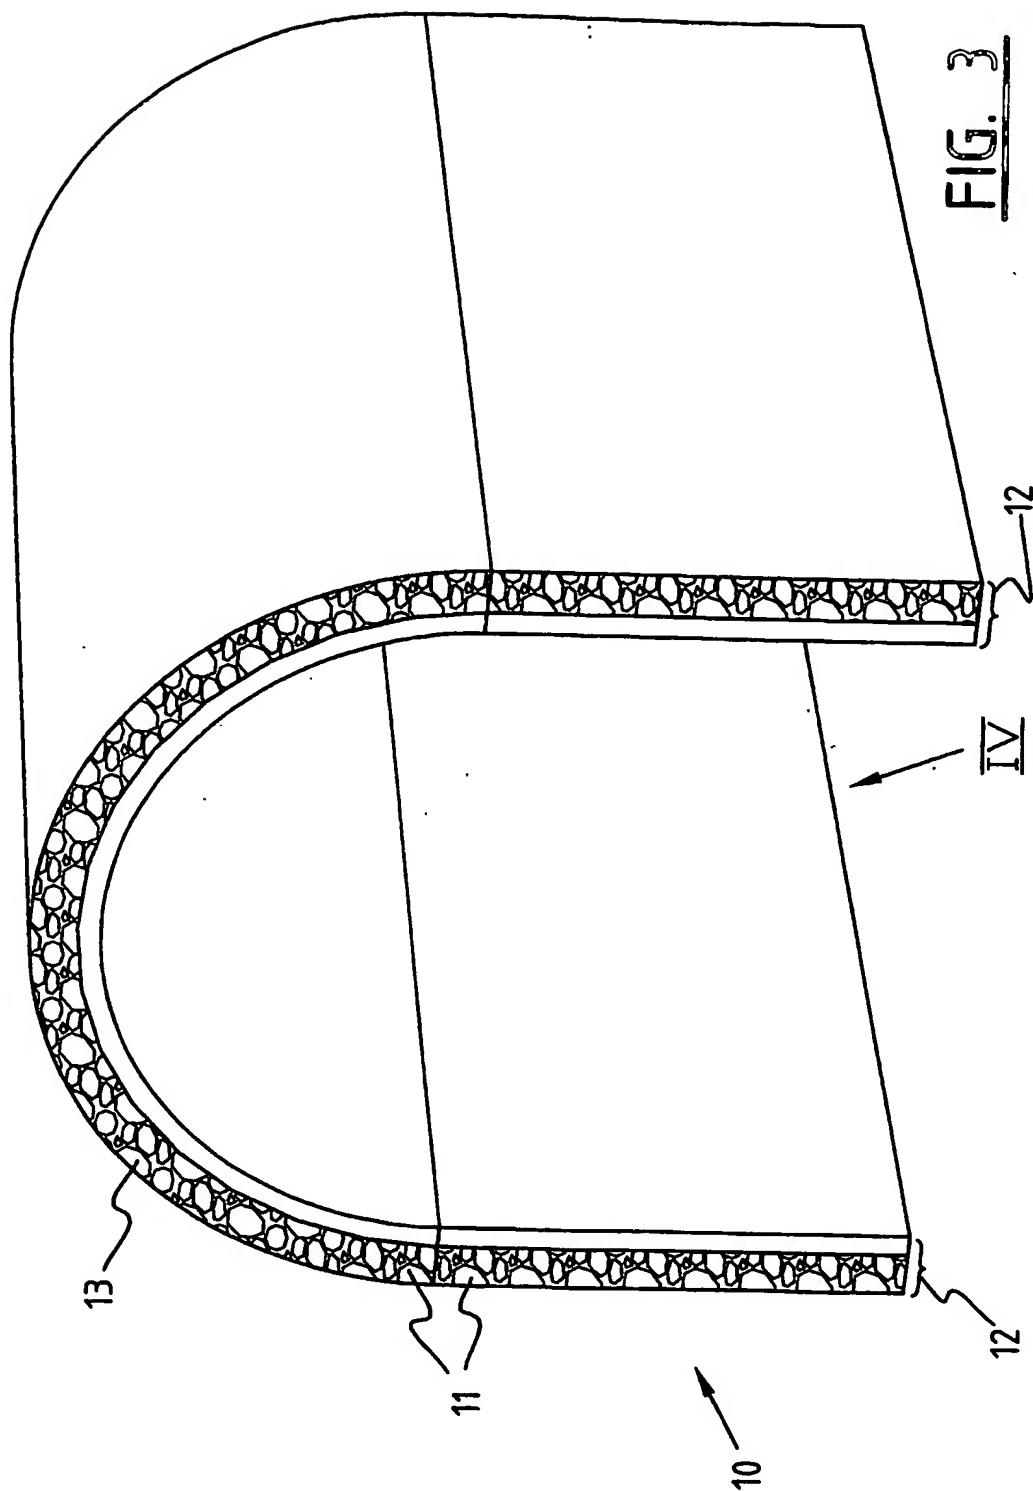

4/4

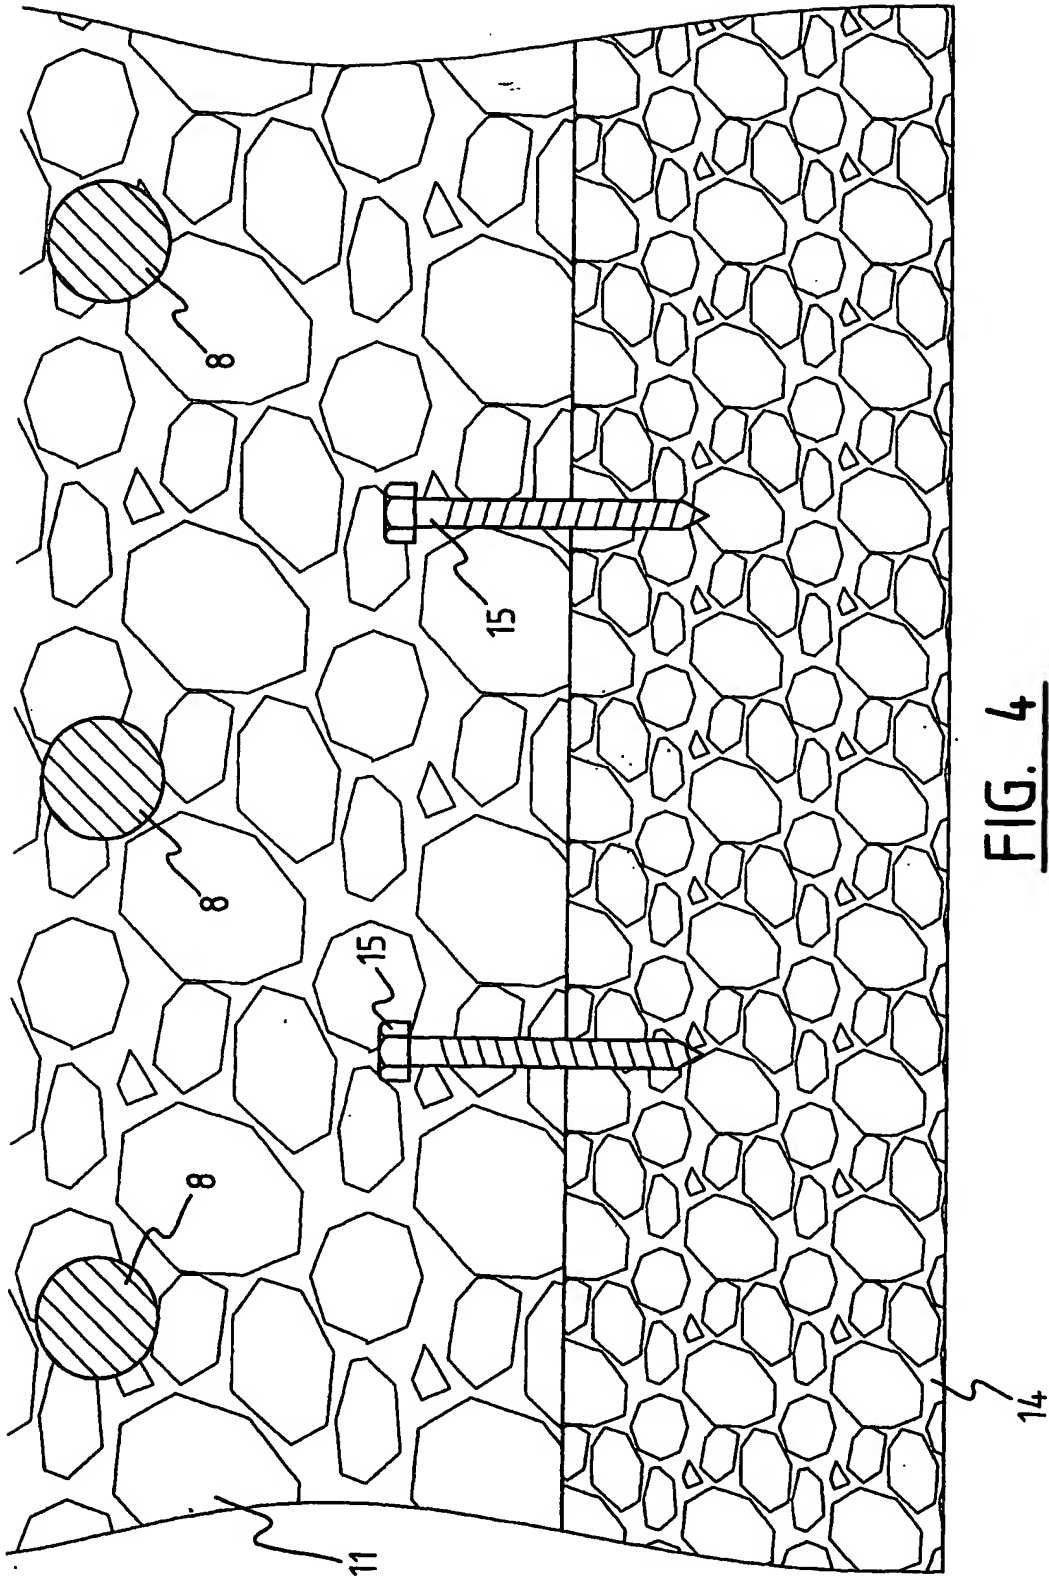

# INTERNATIONAL SEARCH REPORT

International Application No  
/NL2004/000237

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 7 C04B28/02 C04B14/04 C09K21/02 E04B1/94 //(C04B28/02,14:04,18:26)		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC 7 C04B C09K E04B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the International search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data, PAJ, COMPENDEX, CHEM ABS Data		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 001 000 A (THERMAL CERAMICS ITALIANA S R) 17 May 2000 (2000-05-17) paragraphs '0005! - '0021!	1-10
A	US 5 573 589 A (TANAKA YOSHIO ET AL) 12 November 1996 (1996-11-12) column 9, line 63 - column 10, line 14; table 3	1-10
A	US 5 194 087 A (BERG JOHANNES G) 16 March 1993 (1993-03-16) claim 1; example 1	1-10
A	US 5 795 515 A (FISCHER HANS) 18 August 1998 (1998-08-18) column 2, lines 15-29	1-10
<input type="checkbox"/> Further documents are listed in the continuation of box C. <span style="margin-left: 100px;"><input checked="" type="checkbox"/> Patent family members are listed in annex.</span>		
* Special categories of cited documents : <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>*A* document defining the general state of the art which is not considered to be of particular relevance</p> <p>*E* earlier document but published on or after the international filing date</p> <p>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>*O* document referring to an oral disclosure, use, exhibition or other means</p> <p>*P* document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>*A* document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search  <div style="text-align: center; font-weight: bold;">19 August 2004</div>		Date of mailing of the international search report  <div style="text-align: center; font-weight: bold;">26/08/2004</div>
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax (+31-70) 340-3016		Authorized officer  <div style="text-align: center; font-weight: bold;">Raming, T</div>

# INTERNATIONAL SEARCH REPORT

tional Application No

'NL2004/000237

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1001000	A	17-05-2000	EP 1001000 A1	17-05-2000
			AT 257853 T	15-01-2004
			AU 6341199 A	29-05-2000
			DE 69914218 D1	19-02-2004
			WO 0027948 A1	18-05-2000
			EP 1129151 A1	05-09-2001
US 5573589	A	12-11-1996	JP 3297190 B2	02-07-2002
			JP 7010624 A	13-01-1995
			CH 687077 A5	13-09-1996
			DE 4407499 A1	15-09-1994
			FR 2702473 A1	16-09-1994
			IT 1271877 B	09-06-1997
US 5194087	A	16-03-1993	NO 904639 A , B,	19-11-1991
			AU 641247 B2	16-09-1993
			AU 7710691 A	21-11-1991
			CA 2042841 A1	19-11-1991
			DK 94391 A	19-11-1991
			EP 0457516 A1	21-11-1991
			FI 912379 A	19-11-1991
US 5795515	A	18-08-1998	CH 689594 A5	30-06-1999
			BR 9603386 A	09-06-1998
			CA 2183467 A1	17-02-1997